

AMBIUS

ACL12-25W2T

LED CEILING LIGHT

(Dimmable)

CAUTION:

Luminaries and their auxiliary equipment may pose a risk of fire or damage to property if not installed and maintained correctly.

WARRANTY

Your product is warranted against manufacturing faults when used in normal domestic use for a period of three years.

We commit to replacing this product at no charge if it is found to be defective due to a manufacturing fault during the warranty period. This warranty excludes damage caused by misuse, neglect, shipping accident, incorrect installation, or work carried out by anyone other than a qualified electrical service technician.

If your product fails to operate satisfactorily, please return it to the store from whom it was purchased to obtain a replacement product or have it repaired. You will need to produce satisfactory evidence of date of purchase. If the product is to be replaced then that replacement will be of a same or similar product or accessory excluding packaging, instruction card etc.

In New Zealand product is covered by the Consumers Guarantee Act (1993). In accordance with the act consumers are advised that: The manufacturer is not required to maintain repair facility or parts that aren't necessarily available.

In Australia, our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

New Zealand
PO Box 100-707
N.S.M.C
Auckland

Phone +64 (0)9 917 4000
Phone 0800 232 633
info@cdb.co.nz

CDB 

Australia
PO Box 574
South Morang
Victoria, 3752

Phone +61 (0)3 9336 4423
Phone 1300 465 324
info@cdbgoldair.com.au

AMBIUS

ACL12-25W2T

LED CEILING LIGHT

(Dimmable)

DESCRIPTION

AMBIUS CEILING LIGHT DUAL POWER 3K/4K IP65

DIMMING:

This ceiling light can be used in conjunction with Universal, Trailing and Leading Dimmers. It is the installers responsibility to ensure that the dimmer selected is compatible with the characteristics of the lamp.

It should be noted that the light is not designed to start from low dimming. If the light is turned back on from low, there may be a delay before full illumination.

To prevent this always turn the light on at full.

LUMINAIRE SPECIFICATION:

Model.....ACL12-25W2T

Impact resistance.....IK10

Dimmable10% - 100%

Beam Angle120 degrees

Lumens.....1200Lm/2500Lm


Wattage12W/25W

IP Rating.....IP65

Colour temperature.....Switchable 3000K/4000K

Input Voltage.....220-240 Volts ~ 50/60Hz

Mounting Type.....Surface Mounted

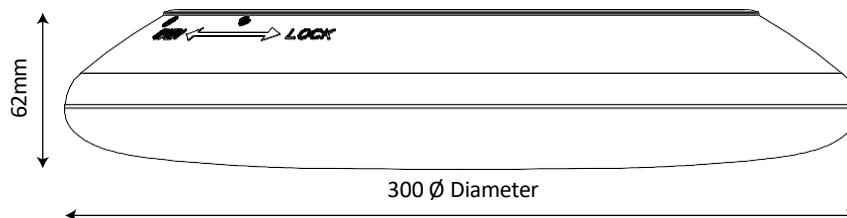

AMBIUS

ACL12-25W2T

LED CEILING LIGHT


(Dimmable)

INSTALLATION

- Always read the instructions carefully before installation, failure to do this could result in damage to the product, property or harm to the installer.
- This product must be installed by a licensed electrician in accordance with the Australian / New Zealand Wiring Rules AS/NZS 3000.
- It is recommended that this product be used on a circuit board protected by an Earth Leakage Circuit Breaker or Safety Switch.
- Allow suitable ventilation around the light fitting and do not cover with any material.
- Do not immerse any part of the light fitting in water or any other liquids.
- Regularly inspect the light fitting to ensure that no damage has occurred, if damage is found cease use and replace.
- Do not attempt to modify this fitting in any way.
- Always install luminaires with the power switched of or isolated off to the area of installation.


STEP 1

Separate the base plate from the fitting by twisting.




STEP 3

This product comes with separate terminal and plug. Remove the cover over the connect terminals and wire accordingly.




STEP 2

Bring cable through the central hole and mount the base plate in the required location using the rubber seals with screws.



STEP 4

Put the terminal box completely into the zip lock on the base. Please ensure the plug faces towards outside of the base plate.



AMBIUS


ACL12-25W2T

LED CEILING LIGHT

(Dimmable)

STEP 5

Use the switches shown in the drawing below to select power (12W/25W) and colour temperature (3000K/4000k).

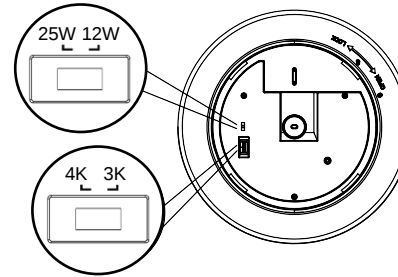

STEP 7

Carefully assemble the light fitting to the base plate by following the markings provided on both - Please align the marking on the light fitting with the arrow marking on the base plate, then ensure the excess cable is tucked into the fitting before pushing the light and the plate together.

Now turn the light in the direction of the "lock arrow" → **LOCK** and therefore, the base plate arrow towards the padlock position.

STEP 8

Please test that the light is firmly locked in position.

STEP 6

Connect the terminal block plug to the plug of the light fitting.

